SonoFlat™ Grid™

Total Sound Control® Since 1977
Auralex® acoustics
www.auralex.com

Based on our popular **SonoFlat™** absorber, the **Auralex® SonoFlat™ Grid™** measures 2' x 2' x 2" and is comprised of nine 8" x 8" beveled squares. Made from **Auralex's** proprietary and world-renowned **Studiofoam®**, these panels offer the impressive mid- and high-frequency absorption the original **SonoFlat™** panels are known for, as well as an elegant look that makes them a great addition to any studio, home theater or listening room.

Features:

- **2' wide x 2' long x 2" thick**
- **Available in charcoal, purple & burgundy**
- **Melamine-free formula won't crumble with age**
- **The innovative pattern lends a seamless look**

Auralex.com / 800-959-3343

SonoFlat® Grid™

The new **SonoFlat™ Grid™** panel's unique design features nine 8" x 8" beveled squares, making them appropriate for a variety of professional and residential applications. The panels are available in three popular colors and are made from **Auralex's** long-lasting, melamine-free formula, which won't crumble with age.

The **Auralex® SonoFlat™ Grid™** was developed out of our clients' desires to have a price-conscious **Studiofoam®** solution with a completely unique, modern aesthetic appeal. This upscale product offers increased low-frequency absorption and a tasteful, seamless appearance.

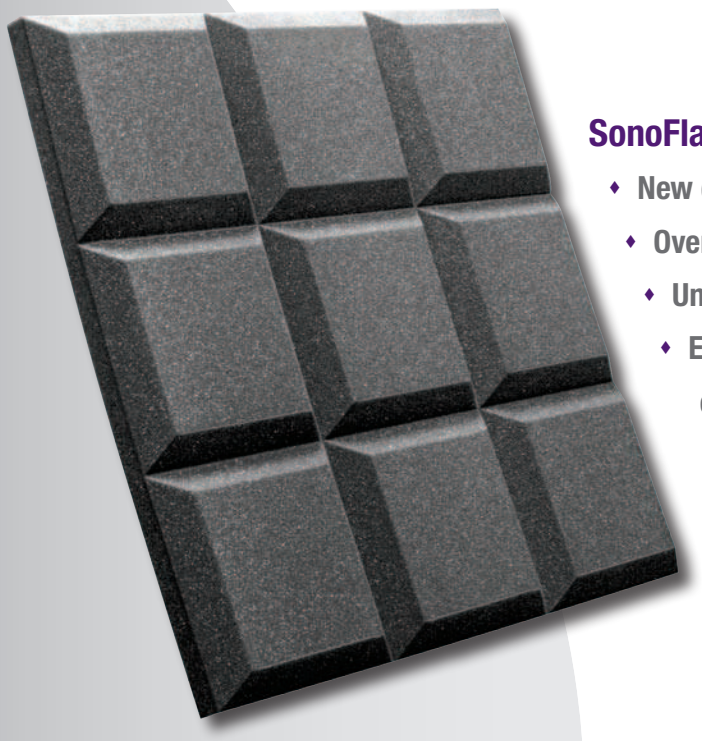

SonoFlat® Grid™

- New design based on original SonoFlat™ profile
- Overall NRC of 0.85
- Unique aesthetic in commercial & residential settings
- Easy Installation using Foamtak™ Spray Adhesive or Tubetak™ Pro Liquid Adhesive

SonoFlat® Grid™ Product Specifications:						
Dimensions	2' wide x 2' tall					
Thickness	Rises from 1" to 2"					
Available Colors	Charcoal, Burgundy & Purple					
Noise Reduction Coefficient (NRC)						
Frequency	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Absorption Coefficients	0.29	0.35	0.98	1.03	0.96	0.96
Overall NRC	**0.85**					

Auralex Acoustics, Inc.
9955 Westpoint Drive, Suite 101 • Indianapolis, IN USA 46256
Auralex.com • 317-842-2600 • 800-959-3343