



Bluma

Poliverb acoustic panels



www.noverb-design.com

General


Dimension: 50 x 50 | 25 x 50 | 25 x 25 cm

Thickness: 4 cm


Material: acoustic Foam UL94-HF1

Applications: wall or ceiling

Mounting: glue or silicone (not included)

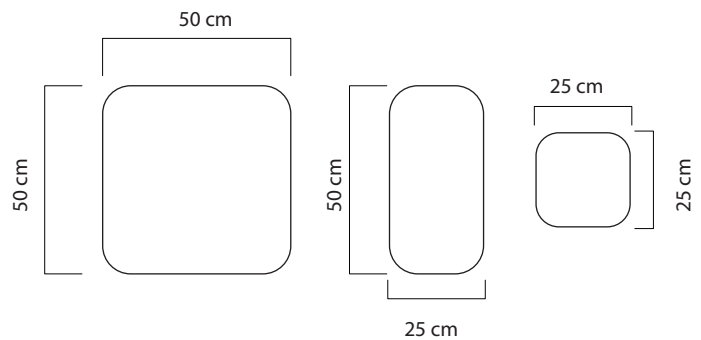

Acoustics

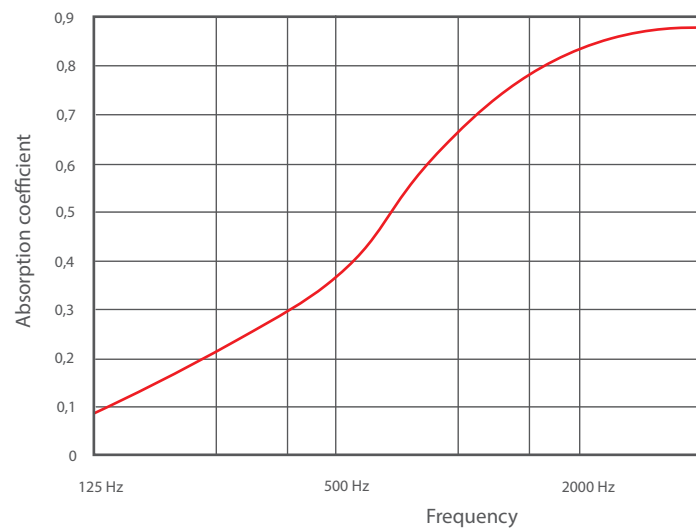

Sound absorbing material

Material: PU Polyether T25 AUX, painted with low Cov content water paint.

Density: ISO 845 25 Kg/m³

Flame test according to standard: UL94-HF1

Temperature Range: -20°C / +110°C

Colors

Dark green



Light green



Green water




Blue



Red brick



Ocher




Bordeaux



Anthracite



Grey



Off white

*Different colors on request.

