



PET ACOUSTIC PANEL PRICELIST

PC 1/2024





Terms and conditions

1. The prices specified in the price list are net Ex Works prices.
2. The price list includes PET felt sheets and fire-resistant PET felt sheets.
3. The sale of PET felt sheets is carried out in accordance with GCS - General Conditions of Sale of DeFelt Sp z o.o.
4. The sale of PET felt sheets is carried out in the format 1220 x 2440 mm in full sheet size (1 sheet = 2,98 of m²) / (1 sheet: 4' x 8'= 32 sgft).
5. Order from the central warehouse of DeFelt Sp. z o.o. Wrocław, Poland.
6. DeFelt Sp. z o.o. reserves the right to change the price list at any time.
7. DeFelt SP. z o. o. is not responsible for any losses resulting from the use of our products. If the complaint is accepted, the maximum compensation may only amount to the purchase price of the PET felt sheet.

Product Features



Acoustic performance

ISO 354-2003 ASTM C423-17
NRC exceeds 0.8 based on a 50mm air gap depending on material thickness and installation method



Fire Rating

EN 13501-1:2007+A1:2009 B
ASTM E-84 Class A
AS ISO 9705-2023 (R2016)



Easy install

PET Panels can be installed on walls and ceilings as well as in office furniture systems and wall panel systems. Panels can be customized into clouds, baffles, tiles, and more. Panels are also tackable for a multipurpose solution in office spaces or educational facilities.



VOC free

SGS Test Report No. SHAEC1408985503
US EPA 5021A:2003 analysis was performed by HS- GS-MS.
CAS No.75-25-2: VOC 0,0001%;
CAS No. 110-54-3: VOC 0,0005%;
CAS No. 71-43-2: VOC 0,0005%;
CAS No. 100-42-5: VOC 0,0005%.



Recyclability

100% PET felt made with at least 60% post-consumer recycled content

Physical Properties



decorative



easy to work with



light weight



termally insulative



ventilate



easy to handle and transport



buffered



printable

Industry-Leading Certification

DeFelt PET Panels, made from 60% recycled plastics, divert hundreds of plastic bottles from landfills. Our products undergo rigorous testing for fire resistance and VOC content, ensuring top quality. Certified by SGS, CNAS, Intertek, and more. DeFelt PET Panels offer superior performance and sustainability.




Choose perfect color for your space!

DeFelt offers 72 colors for the versatility of design. Color can play an important role in conveying information, creating certain moods, and even influencing the decisions people make. Discover how our products can transform your interiors! If you are wondering about the color you can order our PET Acoustic Panel Color Book or A5 Color Sample.



PET Acoustic Panel Color Book

Our PET Acoustic Panel Colour Book of all 72 colours allows you to evaluate and select the right colour shades in real life, which is crucial as the colours on screen may differ from those seen in person. With this solution, you will match the colour perfectly to your needs.

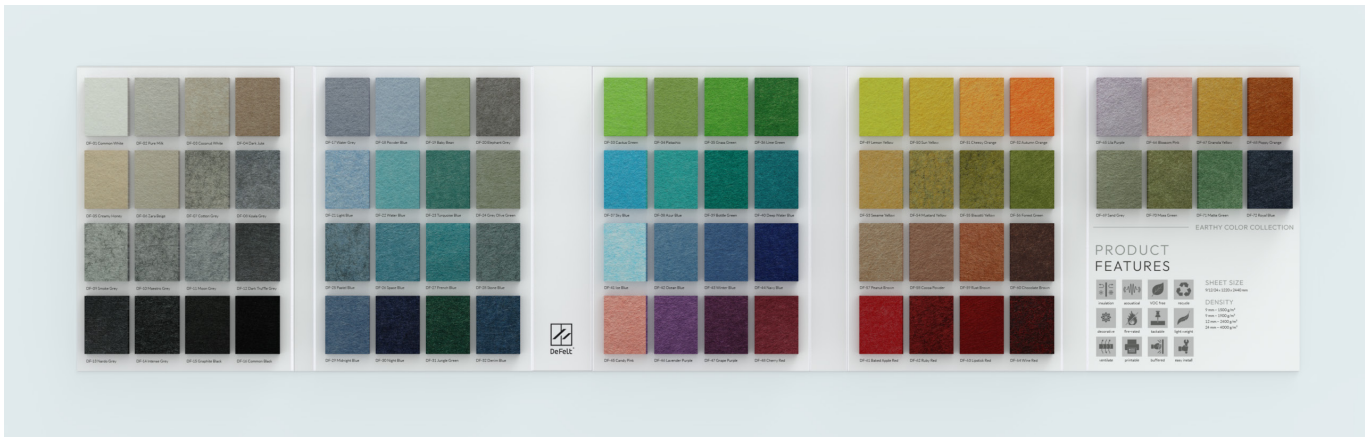

A5 Color Sample

Samples in the colors of your choice measuring 210 x 148 mm. You can take them with you to the project site and match the perfect shade to suit your needs. If you want to order samples please contact with sales departmen.



Write to us to order felt or sample book:

✉ contact@defelt.com

Color availability by property

Panel size 1220 x 2440 mm. Please contact us to make sure that the colors of your choice are available.

Color code	Regular				Fire - rated	
	9 mm 1500 g/m ²	9 mm 1900 g/m ²	12 mm 2400 g/m ²	24 mm 4000 g/m ²	12 mm 2400 g/m ²	24 mm 4000 g/m ²
DF-01	✓	✓	✓	✓	✓	✓
DF-02	✓	✓	✓	✓	✓	✓
DF-03	✓	✓	✓	✓	✓	✓
DF-04	✓	✓	✓	✓	✓	✓
DF-05	✓	✓	✓	✓	✓	✓
DF-06	✓	✓	✓	✓	✓	✓
DF-07	✓	✓	✓	✓	✓	✓
DF-08	✓	✓	✓	✓	✓	✓
DF-09	✓	✓	✓	✓	✓	✓
DF-10	✓	✓	✓	✓	✓	✓
DF-11	✓	✓	✓	✓	✓	✓
DF-12	✓	✓	✓	✓	✓	✓
DF-13	✓	✓	✓	✓	✓	✓
DF-14	✓	✓	✓	✓	✓	✓
DF-15	✓	✓	✓	✓	✓	✓
DF-16	✓	✓	✓	✓	✓	✓
DF-17	✓	✓	✓	✓	✓	✓
DF-18	✓	✓	✓	✓	✓	✓
DF-19	✓	✓	✓	✓	✓	✓
DF-20	✓	✓	✓	✓	✓	✓
DF-21	✓	✓	✓	✓	✓	✓
DF-22	✓	✓	✓	✓	✓	✓
DF-23	✓	✓	✓	✓	✓	✓
DF-24	✓	✓	✓	✓	✓	✓
DF-25	✓	✓	✓	✓	✓	✓
DF-26	✓	✓	✓	✓	✓	✓
DF-27	✓	✓	✓	✓	✓	✓
DF-28	✓	✓	✓	✓	✓	✓
DF-29	✓	✓	✓	✓	✓	✓
DF-30	✓	✓	✓	✓	✓	✓
DF-31	✓	✓	✓	✓	✓	✓
DF-32	✓	✓	✓	✓	✓	✓
DF-33	✓	✓	✓	✓	✓	✓
DF-34	✓	✓	✓	✓	✓	✓
DF-35	✓	✓	✓	✓	✓	✓
DF-36	✓	✓	✓	✓	✓	✓

✓ in stock ✓ on order

MOQ and Lead Time contact sales representative

Color code	Regular				Fire - rated	
	9 mm 1500 g/m ²	9 mm 1900 g/m ²	12 mm 2400 g/m ²	24 mm 4000 g/m ²	12 mm 2400 g/m ²	24 mm 4000 g/m ²
DF-37	✓	✓	✓	✓	✓	✓
DF-38	✓	✓	✓	✓	✓	✓
DF-39	✓	✓	✓	✓	✓	✓
DF-40	✓	✓	✓	✓	✓	✓
DF-41	✓	✓	✓	✓	✓	✓
DF-42	✓	✓	✓	✓	✓	✓
DF-43	✓	✓	✓	✓	✓	✓
DF-44	✓	✓	✓	✓	✓	✓
DF-45	✓	✓	✓	✓	✓	✓
DF-46	✓	✓	✓	✓	✓	✓
DF-47	✓	✓	✓	✓	✓	✓
DF-48	✓	✓	✓	✓	✓	✓
DF-49	✓	✓	✓	✓	✓	✓
DF-50	✓	✓	✓	✓	✓	✓
DF-51	✓	✓	✓	✓	✓	✓
DF-52	✓	✓	✓	✓	✓	✓
DF-53	✓	✓	✓	✓	✓	✓
DF-54	✓	✓	✓	✓	✓	✓
DF-55	✓	✓	✓	✓	✓	✓
DF-56	✓	✓	✓	✓	✓	✓
DF-57	✓	✓	✓	✓	✓	✓
DF-58	✓	✓	✓	✓	✓	✓
DF-59	✓	✓	✓	✓	✓	✓
DF-60	✓	✓	✓	✓	✓	✓
DF-61	✓	✓	✓	✓	✓	✓
DF-62	✓	✓	✓	✓	✓	✓
DF-63	✓	✓	✓	✓	✓	✓
DF-64	✓	✓	✓	✓	✓	✓
DF-65	✓	✓	✓	✓	✓	✓
DF-66	✓	✓	✓	✓	✓	✓
DF-67	✓	✓	✓	✓	✓	✓
DF-68	✓	✓	✓	✓	✓	✓
DF-69	✓	✓	✓	✓	✓	✓
DF-70	✓	✓	✓	✓	✓	✓
DF-71	✓	✓	✓	✓	✓	✓
DF-72	✓	✓	✓	✓	✓	✓

✓ in stock ✓ on order

MOQ and Lead Time contact sales representative

Write to us to order felt or sample book:

✉ contact@defelt.com